

Sockets, Straps & Strike Plates

A selection of accessories for use with Surface and Flush fitted Door Bolts.



Fixings

0603 - no fixings supplied.

0604 - supplied with finish matched no.6 x 38mm wood screws & rawl plugs. 0620 & 5640ASP - supplied with finish matched no.6 x 19mm wood screws. 5642 - supplied with no.6 x 19mm stainless

steel wood screws.



0600 Dust Excluding Socket for mastic fixing into wooden floors or cementing into stone floors



0603 Easy Clean Socket no fixings supplied





0620 Dust Excluding Socket with removable plunger for cleaning & maintenance




0604 Easy Clean Socket supplied with finish matched screws & rawl plugs

		D (diameter)	d (diameter)	M (depth of mortice)	to suit shoot size
	0600/A	Ø 27	Ø 19	45	Ø 11 max
	0600/B	Ø 32	Ø 22	45	Ø 13 max
	0620	Ø 45	Ø 22	48	Ø 11 max
	0603	-	-	20	Ø 13 max
	0604	-	-	20	Ø 13 max










For strengthening the fixing of door face fitted Flush Bolts to help prevent doors splitting when inadvertently closed with the Bolt Shoot still thrown.

5642 Cross Strap for flush bolts (mill finish stainless steel only)







5640ASP Angle Strike Plate designed for use with Ø 11mm flush bolt shoots


DB4:010




Strike Plates

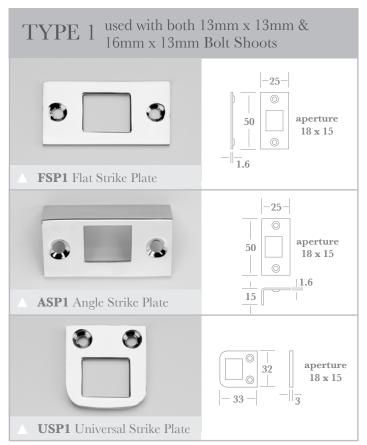

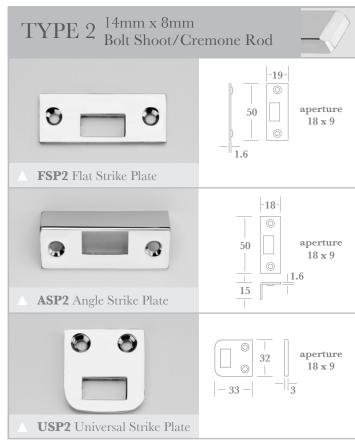

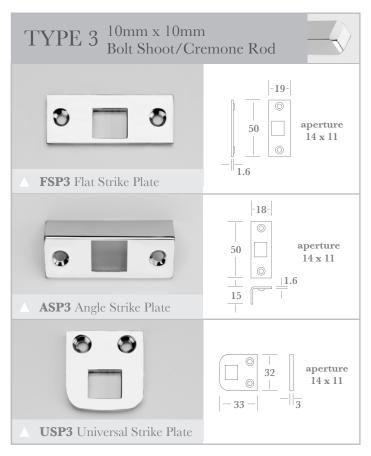

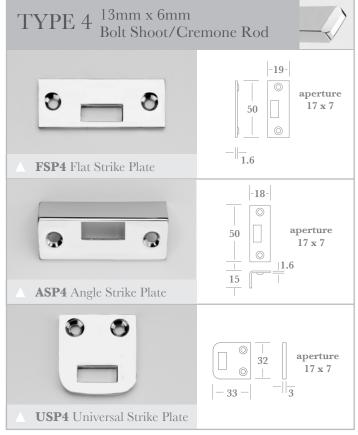

Fixings


Supplied with finish matched no.6 x 19mm wood screws.


 $^{\circ}$ Frank Allart & Company 2015 DB4:020




Staples & Guides



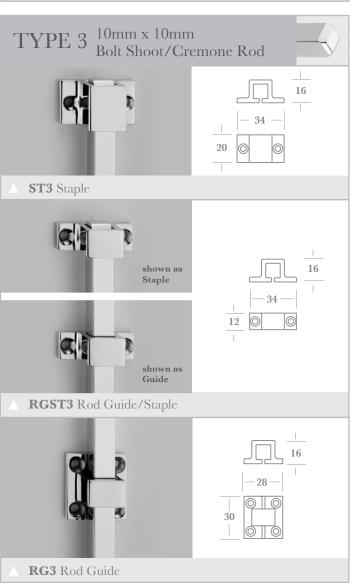

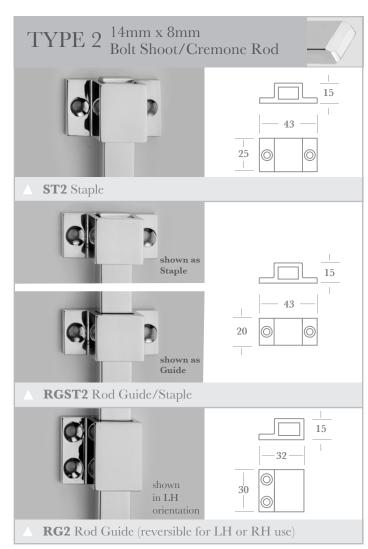

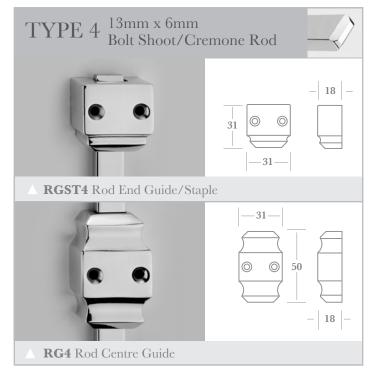

Fixings

Supplied with finish matched wood screws: 0445ST, 0454ST & type 2 - no.8 x 25mm; type 3 - no.6 x 25mm; type 4 - no.6 x 32mm.

© Frank Allart & Company 2015 DB4:030