

# Door Knob Sets

Four classic non-sprung Door Knob designs available in a variety of sizes, functions, and configurations.




## Fixings


Standard Knob Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws and 8mm x 130mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF2:080.


NB. Microtite Spindle Option is recommended for hollow core doors or those fitted with door controls and/or seals.

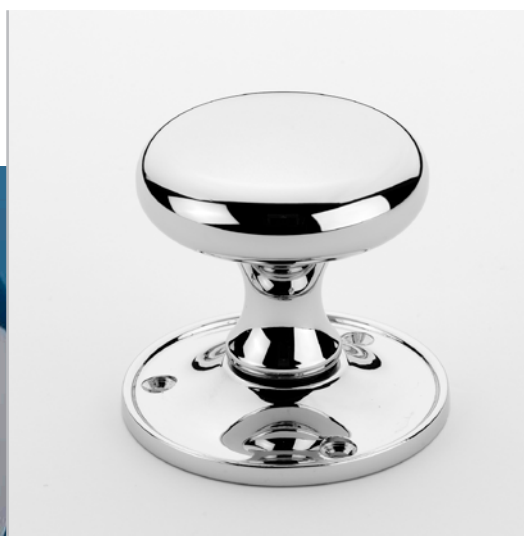

▲ 1022

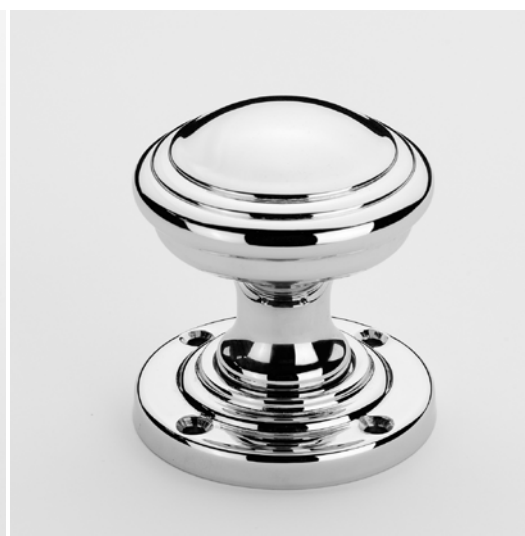


▲ 3048

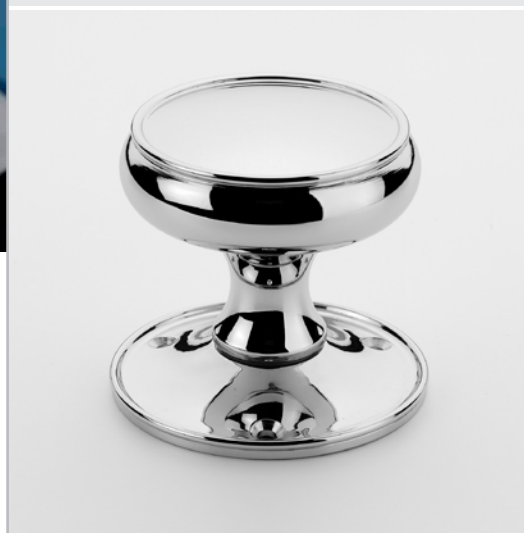


▲ 3035




▲ 3036



1022



3048



3035/6

		D (diameter)	d (diameter)	P (projection)
1022	A	Ø 57	Ø 65	61
3035	B	Ø 62	Ø 70	66
3036	B	Ø 62	Ø 70	66
3048	A	Ø 54	Ø 57	63
	B	Ø 60	Ø 63	66

Options available - see page DF2:080



Rim Lock



Microtite Spindle



Fixed Dead

# Door Knob Sets

Four classic non-sprung Door Knob designs, each available in four sizes, and a variety of functions and configurations.



## Fixings

Standard Knob Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws and 8mm x 130mm stainless steel spindle (60mm max. door thickness).


Alternative spindle lengths and functions are available - see page DF2:080.

NB. Microtite Spindle Option is recommended for hollow core doors or those fitted with door controls and/or seals.


▲ 3034




▲ 3038

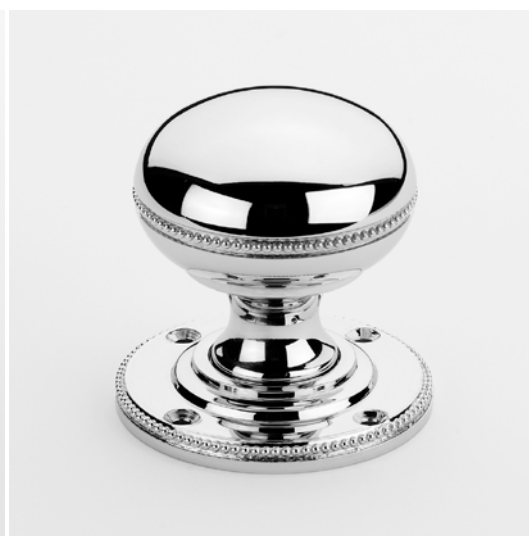

▲ 3041

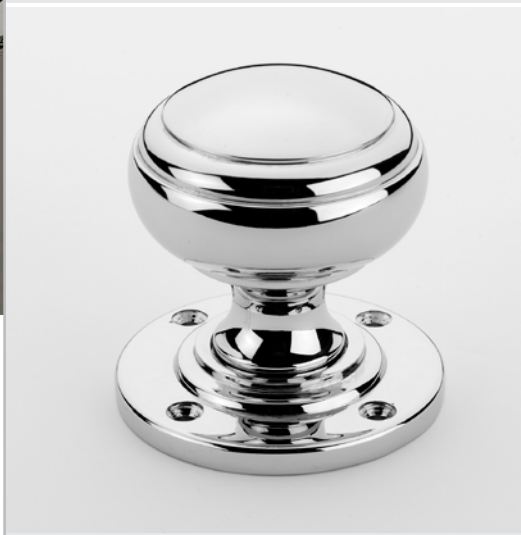

▲ 3045




	AA(*)	A	B	C
D (diameter)	Ø 44	Ø 50	Ø 57	Ø 63
d (diameter)	Ø 51	Ø 57	Ø 64	Ø 70
P (projection)	52	60	66	70

(\*) AA size not available with Microtite Spindle Option

Options available - see page DF2:080



Rim Lock



Microtite Spindle



Fixed Dead

# Door Knob Sets

Four classic non-sprung Door Knob designs available in a variety of functions and configurations.

Each knob is precision CNC machined for accuracy and consistent fine detailing.



## Fixings

Standard Knob Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws. 1023 and 1027 supplied with 8mm x 130mm stainless steel spindle (60mm max. door thickness), 1014 and 1018 supplied with 8mm x 175mm stainless steel spindle (76mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF2:080.

NB. Microtite Spindle Option is recommended for hollow core doors or those fitted with door controls and/or seals.



▲ 1023





▲ 1014



▲ 1027




▲ 1018

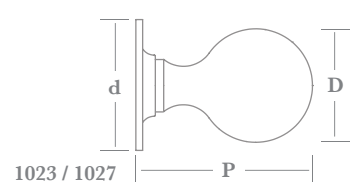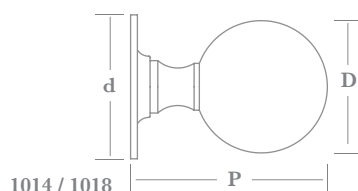

	D (diameter)	d (diameter)	P (projection)
1023	Ø 46	Ø 57	78
1014	Ø 55	Ø 63	85
1027	Ø 45	Ø 57	78
1018	Ø 54	Ø 63	85

Options available - see page DF2:080

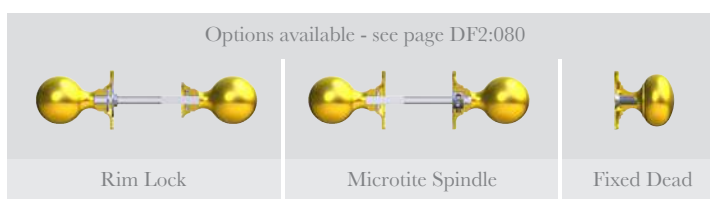




# Door Knob Sets

Four classic non-sprung Door Knob designs available in a variety of sizes, functions, and configurations.

The bead detail on the 3821 is formed in the forging die and therefore has larger beads than the 3036 & 3038 knobs shown on previous pages.

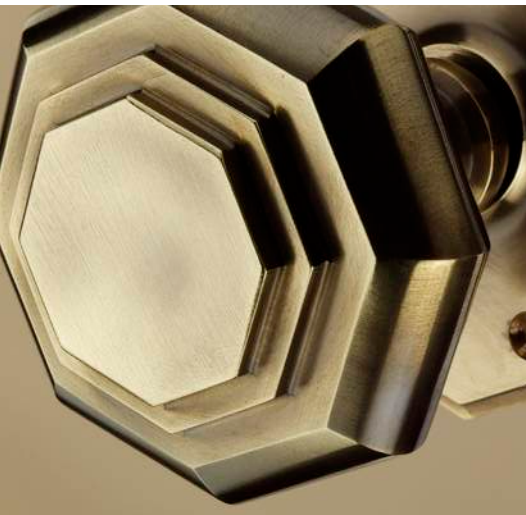

## Fixings

Standard Knob Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws and 8mm x 130mm stainless steel spindle (60mm max. door thickness).

NB. 1064 & 3821 Microtite Spindle Option is recommended for hollow core doors or those fitted with door controls and/or seals.

1065 & 3037 only - supplied with stainless steel lockpoint spindle and grub screw as standard (64mm max door thickness).

Alternative spindle lengths and functions are available - see page DF2:080.



▲ 3037 (no microtite option available)




▲ 3821



▲ 1064






▲ 1065 (no microtite option available)



	3037	A	B
Knob A/F	57	69	
Plate A/F	64	78	
P (projection)	65	74	


A/F = dimension across flats

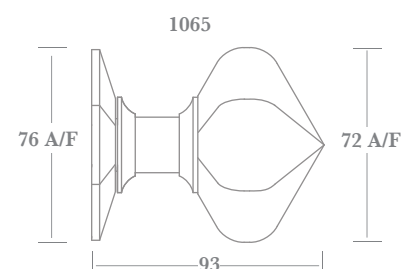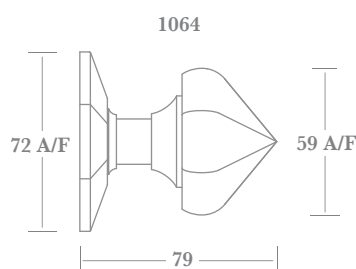

Options available - see page DF2:080



Rim Lock



Microtite Spindle



Fixed Dead

# Door Knob Sets

Two sizes of non-sprung Oval Door Knobs offered fitted to a choice of either Square, Round or Oval Rosettes.

The Square Plate can also be installed in a diamond orientation if desired.




square/diamond plate

▲ 9150




square/diamond plate

▲ 9154




round rosette

▲ 1017



oval rosette

▲ 9152



round rosette

▲ 1021



oval rosette

▲ 9151

## Fixings

Standard Knob Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws and 8mm x 130mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF2:080.

NB. Microtite Spindle Option is recommended for hollow core doors or those fitted with door controls and/or seals.

**Finishes** - See our price list or website for finish availability.

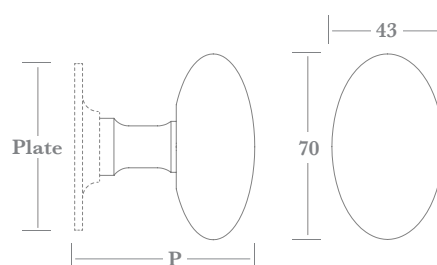


	plate size	P (projection)
9150	57 sq	66
1017	Ø 64	69
9152	70 x 46	69

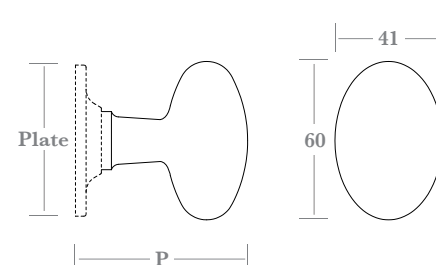


	plate size	P (projection)
9154	57 sq	62
1021	Ø 57	65
9151	70 x 46	65

Options available - see page DF2:080



Rim Lock



Microtite Spindle



Fixed Dead

## Door Knob Sets

A domed non-sprung Oval design Door Knob offered fitted to a choice of either Square, Round or Oval Rosettes - along with a non-sprung Art Deco design Door Knob on rectangular Plate.

Both knobs are available in a variety of functions and configurations.

The Square Plate can also be installed in a diamond orientation.



square/diamond plate

▲ 9155



round rosette

oval rosette

▲ 9157

▲ 9153


### Fixings

Standard Knob Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws and 8mm x 130mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF2:080.

NB. Microtite Spindle Option is recommended for hollow core doors or those fitted with door controls and/or seals.

**Finishes** - See our price list or website for finish availability.

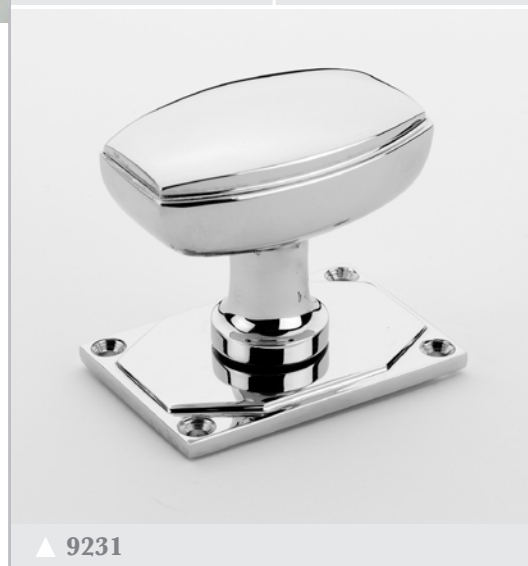

▲ 9231



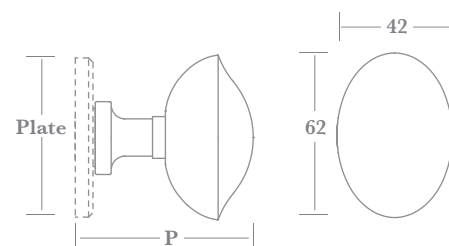


	plate size	P (projection)
9155	57 sq	64
9157	Ø 57	67
9153	70 x 46	67



Options available - see page DF2:080



Rim Lock



Microtite Spindle



Fixed Dead

# Door Knob Sets & Ring Handles

A choice of two non-sprung Door Knobs fitted to large rectangular Backplates, traditionally known as 'School Board Plates'.

Two designs of non-sprung Ring Handle Sets, each available in two sizes, offered with a variety of functions and configurations.



## Fixings


Standard Knob Sets are designed for uncontrolled, hinged, solid residential doors and are supplied with finish matched no.6 x 19mm wood screws and 8mm x 130mm stainless steel spindle (60mm max. door thickness).

Alternative spindle lengths and functions are available - see page DF2:080.

NB. Microtite Spindle Option is recommended for hollow core doors or those fitted with door controls and/or seals.




▲ 1024



knob size 46 diameter






▲ 1032



knob size 60 x 40



▲ 1040

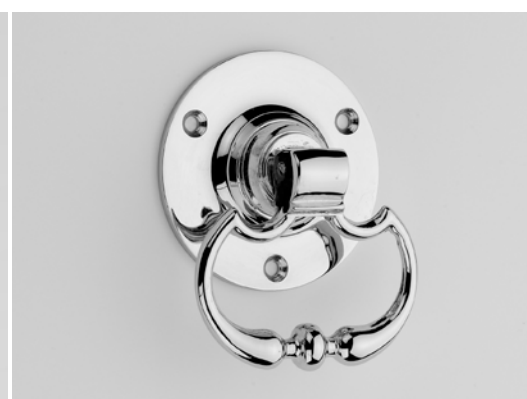

▲ 1041



RIM LOCK  
OPTION

Please refer to page DF2:080  
for further information

1040/1	A	B
P (projection)	34	36
W (width)	63	76
D (diameter)	63	63




# Door Knob Options

## Fixed Dead (Dummy) Option

As an alternative to using Taylors Spindles (see below) we can factory fix dead Knobs to plates and roses.


To order this option add **FD** to code for half sets (e.g. 3034PB/B/**FD**) or **FDS** for full sets (e.g. 3034PB/B/**FDS**).

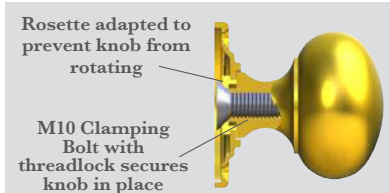

## Microtite Option

- Recommended for hollow core doors or those fitted with a door control and/or seals.
- Unique design.
- Infinitely adjustable for doors between 35mm and 65mm thick.
- All the pulling force transferred through the spindle.
- No visible grubscrew.
- Split finish sets are available - please contact for coding and pricing information.

To order this option add **MC** after primary code (e.g. 1064**MC**/PB).


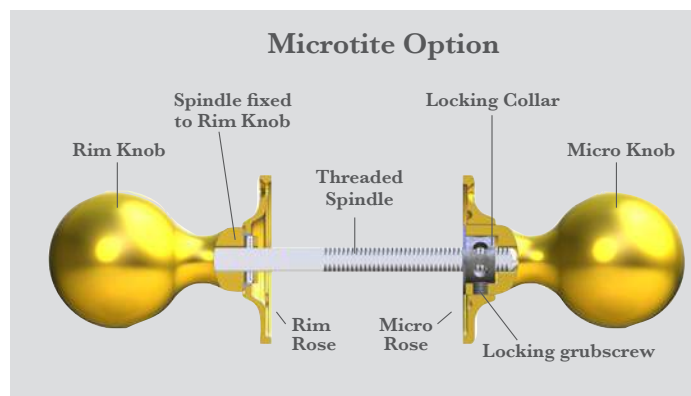


## Rim Lock Options


- Unique design.
- Infinitely adjustable for overall thickness (door + rim lock) between 55mm and 95mm thick.
- All the pulling force from the rim lock side transferred through the spindle.
- No visible grubscrew.
- Split finish sets are available - please contact for coding and pricing information.

To order this option add **RM** after primary code (e.g. 1017**RM**/PB).


To order Rim End Only add **RE** after primary code (e.g. 1017**RE**/PB).

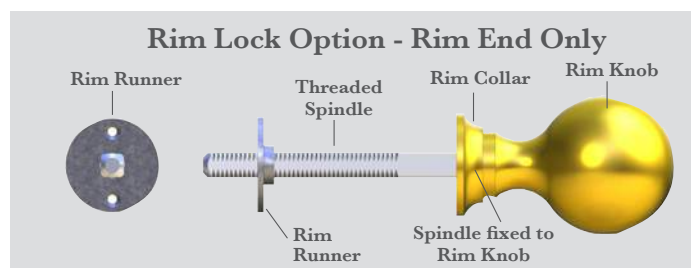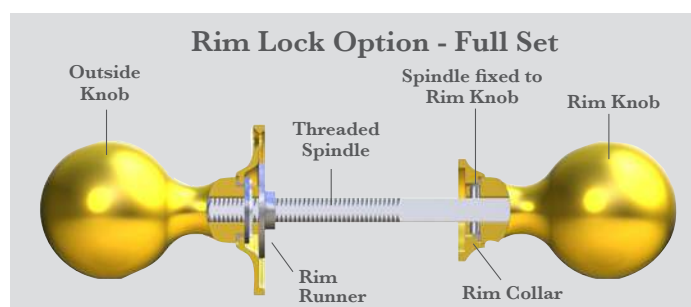

## Spindle Options

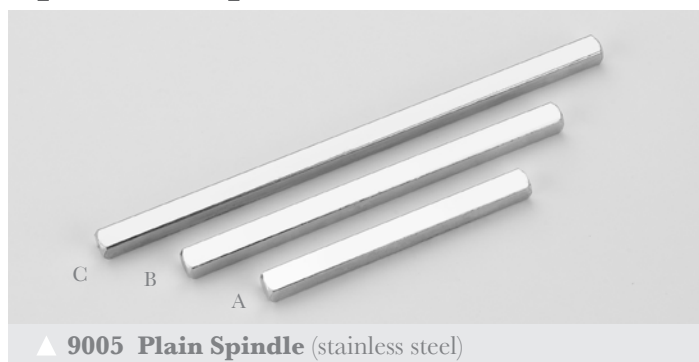


	A	B	C
L (length)	90	130	175



For fixed dead mounting of 1065 & 3037 knobs (DF2:040).  
Supplied with no.6 x 19mm wood screws.

▲ **9001 Taylors Spindle** (stainless steel)



For fixed dead mounting of traditional knob & lever furniture (sections DF1 & DF2).  
Supplied with no.6 x 19mm wood screws.

▲ **9000 Taylors Spindle** (zinc plated steel)